




Install the cover

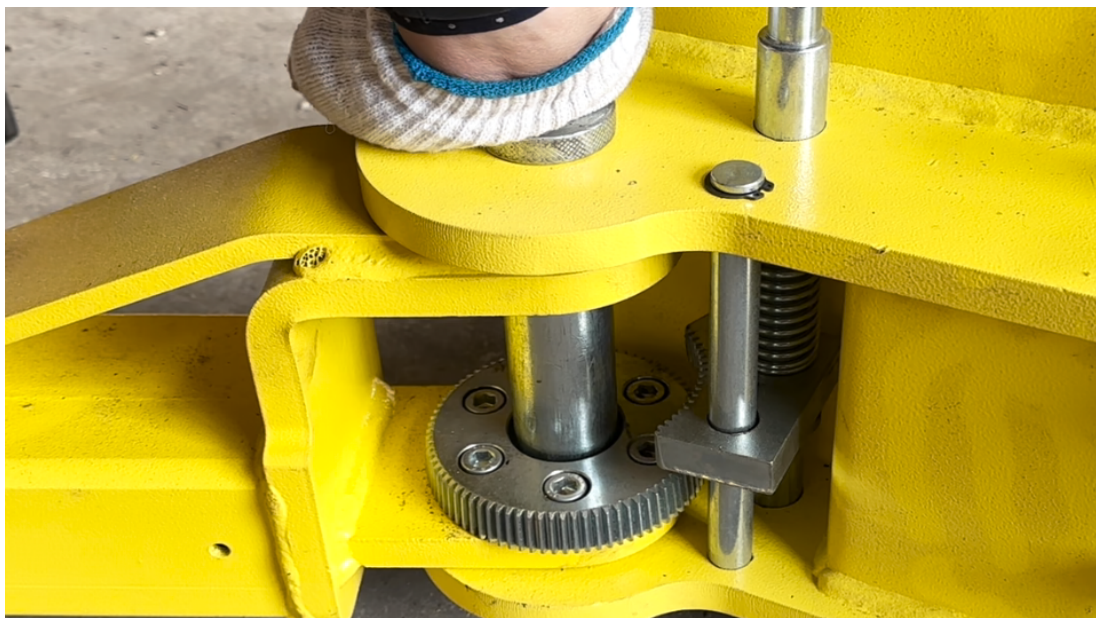

Install the arm

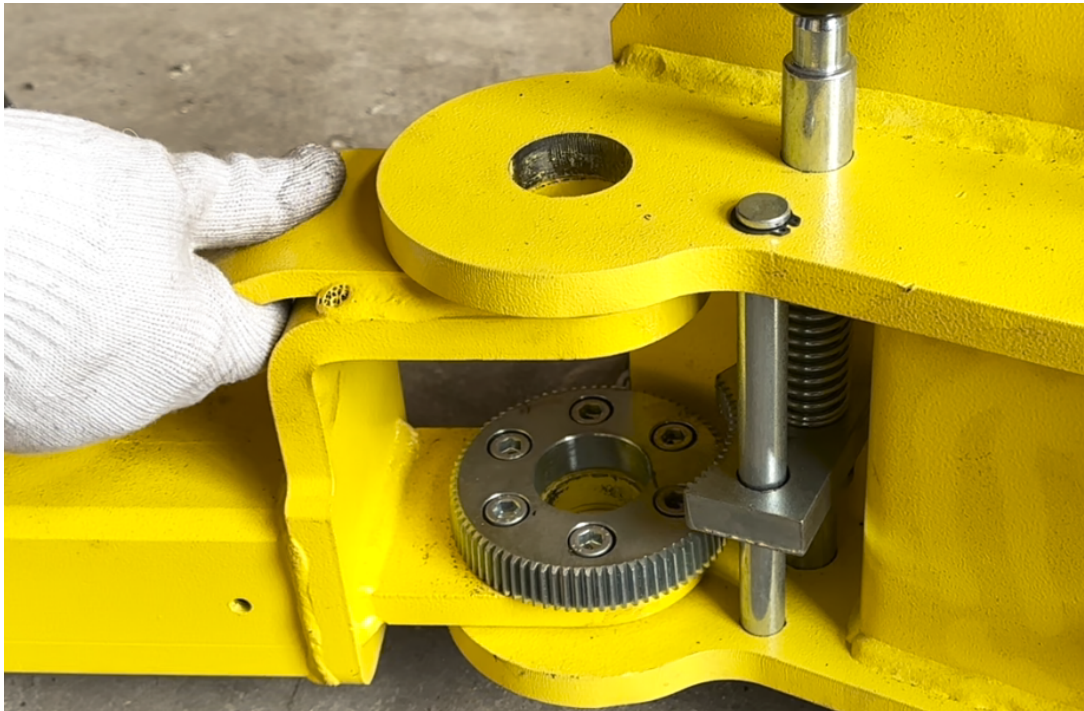

Connect oil tube

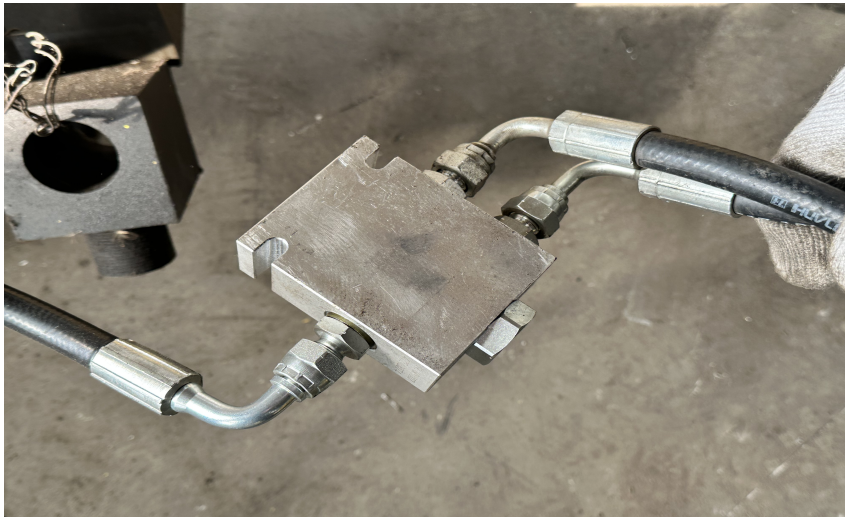



It can be fixed in two ways:**Directly install expansion bolts**
Use an embedded plate: Install four hooks at the base and embed the plate into the ground.